
The book was found

Designing Dynamic Circuit Response (Analog Circuit Design)



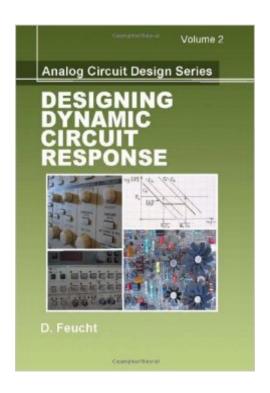

Synopsis

The Analog Circuit Design set reduces the concepts of analog electronics to their simplest, most obvious form which can easily be applied (even quantitatively) with minimal effort. The emphasis of the set is to help you intuitively learn through inspection how circuits work and apply the same techniques to circuits of the same class. This second volume, Designing Dynamic Circuit Response builds upon the first volume Designing Amplifier Circuits (9781891121869) by extending coverage to include reactances and their time- and frequency-related behavioral consequences. Retaining a design-oriented analysis, this volume begins with circuit fundamentals involving capacitance and inductance and lays down the approach using s-domain analysis. Additional concepts and perspectives fill in the blanks left by textbooks in regards to circuit design. It simplifies dynamic circuit analysis by using the graphical methods of reactance plots. Methods of compensating amplifiers, including feedback amplifiers, are kept as simple as possible using reactance plots and s-domain transfer functions that mainly require algebraic skill.

Book Information

Series: Analog Circuit Design (Book 2)

Paperback: 203 pages

Publisher: SciTech Publishing (December 2, 2010)

Language: English

ISBN-10: 1891121839

ISBN-13: 978-1891121838

Product Dimensions: 5.9 x 0.6 x 8.7 inches

Shipping Weight: 12.6 ounces (View shipping rates and policies)

Average Customer Review: 4.0 out of 5 stars Â See all reviews (2 customer reviews)

Best Sellers Rank: #2,744,975 in Books (See Top 100 in Books) #62 in Books > Engineering &

Transportation > Engineering > Electrical & Electronics > Electronics > Solid State #837 in Books

> Engineering & Transportation > Engineering > Electrical & Electronics > Circuits > Design

#19384 in Books > Science & Math > Technology

Customer Reviews

For any person wanting to learn the fine details of analog solid state design the series of books by Feucht is excellent. He is an experienced and competent engineer who handles his subject clearly and professionally. His background as a vertical amplifier designer at Tektronix gives him a solid foundation for this book on amplifier design. Here transistor modelling is covered in detail and

several working circuits are given and can be checked with SPICE or by construction. Young engineers in training will benefit from the foundational approach used. Those who are accustomed mainly to using opamps as building blocks will learn the fundamentals of discrete transistor multistage amplifier design. As a seasoned analog designer myself, I recommend the book highly.

There is some merit to this series. Unfortunately it is hard to follow some of the analysis, and it will leave the inexperienced young electronics professional unable to follow....I have a fair bit of experience, and I find certain sections hard to follow. Another thing is there are examples of bad amplifier analysis or circuits that just won't work. Two examples: Botched amplifier noise analysis. ON page 95, in Volume 3, under his example of opamp input noise he has a completely botched analysis of the output noise. He doesn't give an equation (see what I mean?), but it's not too hard to figure out what he is doing. His equation (not given, but intuited from data given):eno=sqrt(eni^2 + $2(enR)^2 + (in^*rin||Rfb)^2 = 61.1nV/rtHz$ All Wrong!The proper equation:eno=sqrt($((1+Rfb/rin)*eni)^2 + (in*Rfb)^2 + 2(enR)^2) = 70.8nV/rtHzThe only reason he ends up somewhat$ close to the correct answer is because the 100k resistors used in his example comprise the dominant source of noise. Its obvious if you are in an inverting gain of 1 that the amplifier itself is in a noise gain of 2, which means you have to at least get 2x the input referred voltage noise at the output.....(1+Rfb/rin)*eni or 40nV^rtHz. The resistors contribute the sgrt(2)*40.7nV/rtHz...or 57.55nV/rtHz....the current noise is only gained up to the output by the feedback resistor in*rfb = 10nV/rtHz. Rss those together you get the 70.8nV/rtHz. Another example of a circuit that will not work is the one on page 125, which has positive feedback, and would latch at one supply rail or the other depending on amplifier offset.

Download to continue reading...

Designing Dynamic Circuit Response (Analog Circuit Design) Analog Circuit Design: Art, Science and Personalities (EDN Series for Design Engineers) Winter Circuit (Show Circuit Series -- Book 2) (The Show Circuit) CMOS Analog Circuit Design (The Oxford Series in Electrical and Computer Engineering) Zen of Analog Circuit Design Analog Integrated Circuit Design Analog Filter and Circuit Design Handbook CMOS Analog Circuit Design High-Frequency Analog Integrated Circuit Design (Wiley Series in Microwave and Optical Engineering) Host Response to Biomaterials: The Impact of Host Response on Biomaterial Selection Dynamic Offset Compensated CMOS Amplifiers (Analog Circuits and Signal Processing) Dynamic Programming and Optimal Control, Vol. II, 4th Edition: Approximate Dynamic Programming VLSI Analog Signal Processing Circuits: Algorithm, Architecture, Modeling, and Circuit Implementation Analog Methods for Computer-Aided Circuit

Analysis and Diagnosis (Electrical and Computer Engineering) askGabe about Creating a Website:

Do-It-Yourself Secrets and Strategies to Designing and Building Your Own Static and Dynamic

Websites for the Lowest Cost ... (Second Edition) (The askGabe Series) Summer Circuit (Show

Circuit Series -- Book 1) Circuit Engineering: The Beginner's Guide to Electronic Circuits,

Semi-Conductors, Circuit Boards, and Basic Electronics 2015 Federal Circuit Yearbook: Patent Law

Developments in the Federal Circuit CMOS SRAM Circuit Design and Parametric Test in

Nano-Scaled Technologies: Process-Aware SRAM Design and Test (Frontiers in Electronic Testing)

Skew-Tolerant Circuit Design (The Morgan Kaufmann Series in Computer Architecture and Design)

Dmca